



DA-NM12R/132GN

Monocrystalline Module
Bifacial Dual Glass

600W-630W

Grade A

630W

Maximum Power
Output

23.50%

Maximum Module
Efficiency

0~+3%

Power Output
Guarantee

TOPCON



16BB(182*210mm)

FIRE CLASS C

Fire protection through double glazing according to safety requirements

REINSURANCE COVERAGE

Doart is reinsured for 30 years of performance guarantee



High quality silicon wafers guarantee high power module output and excellent cost-effectiveness, making it an ideal choice for large power plants



Selected packaging materials and strict process plans to ensure component PID resistance



Lower oxygen and carbon content leads to lower LID



Adapt to harsh outdoor environments through weather resistance tests such as sand and dust, salt spray, and ammonia gas



The design of series and parallel connection reduces the series resistance R_s of components, reduces internal electrical performance losses, and improves the power generation capacity of the system end



Our company has concluded a reinsurance agreement with Ariel Re - Lloyd's syndicate 1910

Deliver Reliable Performance Over Time


- manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO9001:2015, ISO14001: 2015 and ISO 45001:2008
- Tested for harsh environments (salt mist, ammonia corrosion, sand blowing test and PID test: IEC 61701, IEC 62716)
- Long term reliability tests
- 2×100% EL inspection ensuring defect-free modules
- Fire class1 certificate for ITALY

WARRANTY

12 years product warranty

30 years performance warranty

Linear Performance Warranty

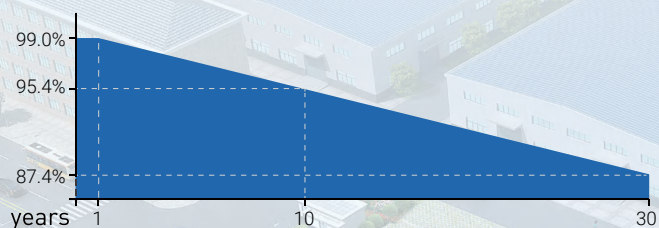

12 Years Product Warranty 30 Years Linear Power Warranty

* Please refer to standard warranty for details

Product Certification



DA-NM12R/132GN

Monocrystalline Module Bifacial Dual Glass 600W-630W

Electrical Specification STC*

Maximum Power	P _{max} [W]	600	605	610	615	620	625	630
Maximum Power Voltage	V _{mp} [V]	40.30	40.50	40.80	41.10	41.40	41.70	42.00
Maximum Power Current	I _{mp} [A]	14.91	14.94	14.96	14.98	14.99	15.00	15.01
Open Circuit Voltage	V _{oc} [V]	48.40	48.70	49.00	49.30	49.60	49.90	50.20
Short Circuit Current	I _{sc} [A]	15.80	15.83	15.86	15.89	15.91	15.92	15.94
Module Efficiency	[%]	22.30	22.50	22.70	22.90	23.10	23.30	23.50
Power Output Tolerance	W	0~+3%						

* Irradiance 1000W/m², Module Temperature 25°C, Air Mass 1.5

Electrical Specification{NOCT*}

Maximum Power	P _{max} [W]	455	459	463	467	471	475	479
Maximum Power Voltage	V _{mp} [V]	37.20	37.50	37.80	38.10	38.40	38.70	39.00
Maximum Power Current	I _{mp} [A]	12.23	12.24	12.26	12.28	12.29	12.30	12.31
Open Circuit Voltage	V _{oc} [V]	46.00	46.30	46.60	46.90	47.20	47.50	47.80
Short Circuit Current	I _{sc} [A]	12.60	12.63	12.66	12.69	12.72	12.75	12.78

* Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Mechanical Data

Number of Cells	132 pieces [6×22]
Dimensions of Module L*W*H [mm]	2382×1134×30/35mm
Weight [kg]	Approx 35.0/35.3 kg
Front Side Glass	2.0mm, Anti-reflection coating glass
Back Side Glass	2.0mm, High transparency solar glass
Frame	Alloy Steel Frame
J-Box	Protection level IP68
Cable	4.0mm ² , 300mm
Number of diodes	3
Wind/Snow Load	2400 Pa/5400 pa*
Connector	MC4 compatible or MC compatible

* For more details please check the installation manual

Temperature Ratings

Temperature {NOCT} Nominal Operating Cell	44±2°C
Temperature Coefficient of I _{sc}	+0.046%/°C
Temperature Coefficient of V _{oc}	-0.250%/°C
Temperature Coefficient of P _{MAX}	-0.300%/°C

Temperature Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC-[H]
Max Series Fuse Rating	35A



Packaging Configuration

Module per box	37/32pieces
Module per 17.5 flatcar	851/832pieces
Module per 40 container	740/640pieces


Optional

Connector	Original MC
Cable length	1200mm
Frame	Black
Backsheet	Black

Module Dimension

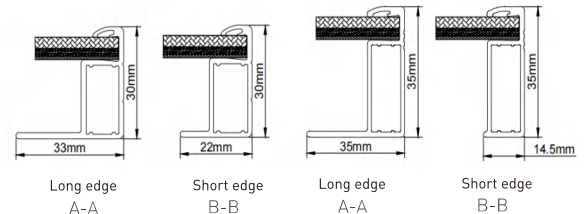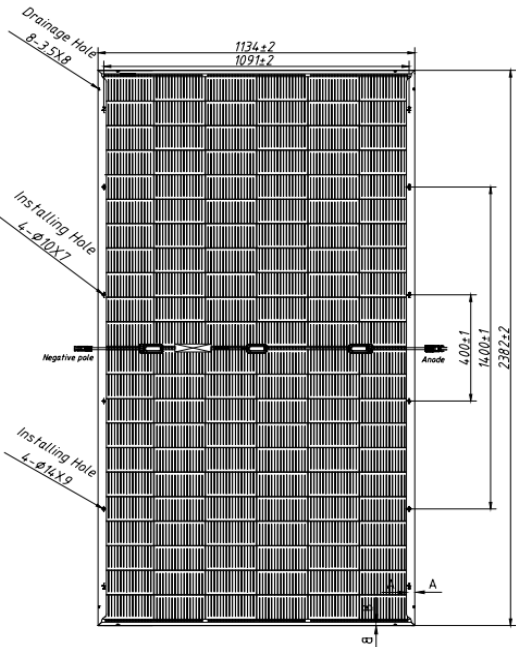

I-V Curve at Different Temperature (630W)

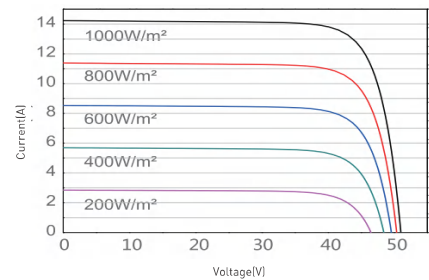

I-V/P-V Curve at Different Irradiation (630W)

